


# PPLLC Globe Dimensions

Globe Diameter	Flange Type	Flange Diameter (A)	Opening Diameter (B)	Neck Diameter (C)	Flange Thickness (D)	Neck Height (E)
8	Solid Flange	4.00	3.56	3.80	0.13	0.25
8	Twist Lock	4.00	3.40	3.70	0.16-0.23	0.20
10	Solid Flange	4.00	3.30	3.65	0.13	0.40
10	Twist Lock	4.00	3.40	3.70	0.16-0.23	0.30
11	Solid Flange	4.00	3.30	3.65	0.13	0.40
11	Twist Lock	4.00	3.40	3.70	0.16-0.23	0.30
12	Solid Flange	5.62	5.25	5.50	0.10	0.15
12	Twist Lock	5.70	4.80	5.00	0.15-0.20	0.30
14	Solid Flange	5.65	5.25	5.50	0.11	0.12
14	Twist Lock	5.70	4.80	5.00	0.15-0.20	0.30
16	Solid Flange	5.65	5.25	5.00	0.11	0.20
16	Twist Lock	5.70	4.80	5.00	0.15-0.20	0.30
18	Solid Flange	5.80	4.80	5.00	0.25	0.30
18	Twist Lock	7.50	6.50	6.90	0.20	0.50
20	Solid Flange	7.50	6.30	7.20	0.20	0.50
22	Solid Flange	9.12	7.90	8.50	0.18	0.55
24	Solid Flange	9.12	7.90	8.50	0.18	0.55

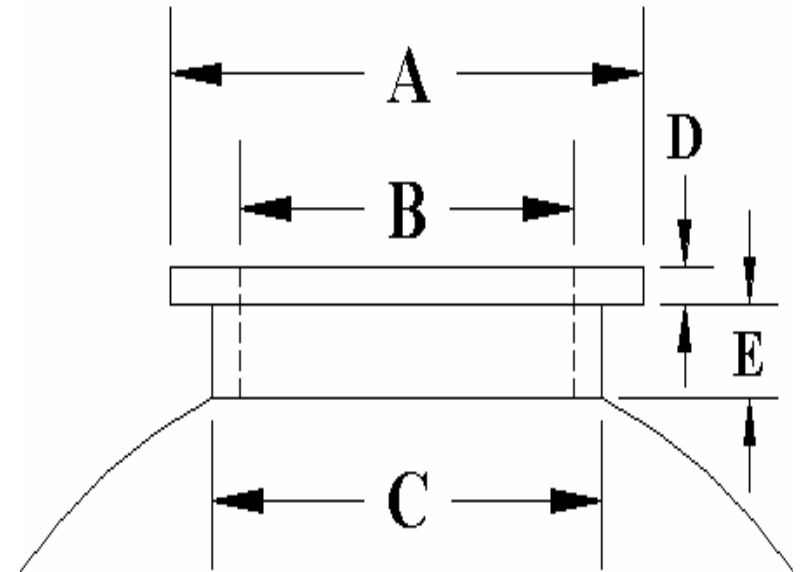

All dimensions are measured in inches.

Dimensions are for reference purposes only.

Custom hole cuts are available.